



**ViConnect PRO**



*Please insert your text here.*

# PROJECT SPECIFICATION

# Overview

PREVIEW	MODEL NUMBER	PRODUCT GROUP	DESCRIPTION
---------	--------------	---------------	-------------

## 1. POSITION



922142	WC element for dry-wall	ViConnect Pro
		500 [mm]
		1120 [mm]
		135 [mm]
		15 [kg]

## 2. POSITION



922143	Flush plate	ViConnect Pro
		280 [mm]
		160 [mm]
		16 [mm]
		0,6 [kg]

# WC element for dry-wall ViConnect Pro

## PRODUCT INFORMATION

### 1. POSITION



<b>Model</b>	<b>922142</b>
Collection	ViConnect Pro
Width	500 [mm]
Height	1120 [mm]
Depth	135 [mm]
Weight	15 [kg]
Description	<p>For dry-wall construction; standard height for covering with plasterboard, installation onto a solid brick wall, in dry-wall constructions etc.; for dry-wall construction; adjustment range of feet from unfinished floor level to upper edge of finished floor level: 0-200mm; adjustment range front to wall: 135-205mm (when mounted on wall brackets); 4-point fastening with wall brackets; includes support feet and fastening materials for installation in front of wall, sideways or in corners; with protection cap for the flushing pipe; 2 times M12 WC retaining bolts adjustable to 180mm with protection plugs and nuts; installation instructions; without flush plate; Individual packaging materials;</p> <p>For combination with als wall-hung WC (incl. SupraFix WWC, WWC with shortened back panel and WC with extended radius); combinable with Aquareduct ceramics (LEED points: 4); self-supporting powder-coated steel frame; fully pre-assembled; front operated; mechanical push button transmission to drain fitting; with protection cap for the flushing pipe; concealed cistern with insulation against condensation with dual flush 3/6l, adjustable to 3/4,5l, maximal flush quantity 7,5l, filling valve Noise Class I, flexible hose for filling valve, can be tightened by hand, 2-part angle valve connection set R1/2, mounting clip for drain bend, 4 adjustment settings, protection box for access opening can be cut to size, with depth-adjustable WC connecting bend 90° DN 90 (Ø90) / with reducing sleeve DN 90 (Ø90)/DN 100 (Ø110) with protection cap, complete WC connection set DN 90 ( Ø90)/180mm, certification marks for concealed cistern: Noise Class I</p>


Specification text	<p>For dry-wall construction; standard height; size 500 x 1120 x 135 mm; for covering with plasterboard, installation onto a solid brick wall, in dry-wall constructions etc.; for dry-wall construction; adjustment range of feet from unfinished floor level to upper edge of finished floor level: 0-200mm; adjustment</p>
--------------------	---

range front to wall: 135-205mm (when mounted on wall brackets);  
4-point fastening with wall brackets; includes support feet and fastening materials for installation in front of wall, sideways or in corners; with protection cap for the flushing pipe; 2 times M12 WC retaining bolts adjustable to 180mm with protection plugs and nuts; installation instructions; without flush plate; Individual packaging materials;  
For combination with als wall-hung WC (incl. SupraFix WWC, WWC with shortened back panel and WC with extended radius); combinable with Aquareduct ceramics (LEED points: 4); self-supporting powder-coated steel frame; fully pre-assembled; front operated; mechanical push button transmission to drain fitting; with protection cap for the flushing pipe; concealed cistern with insulation against condensation with dual flush 3/6l, adjustable to 3/4,5l, maximal flush quantity 7,5l, filling valve Noise Class I, flexible hose for filling valve, can be tightened by hand, 2-part angle valve connection set R1/2, mounting clip for drain bend, 4 adjustment settings, protection box for access opening can be cut to size, with depth-adjustable WC connecting bend 90° DN 90 (Ø90) / with reducing sleeve DN 90 (Ø90)/DN 100 (Ø110) with protection cap, complete WC connection set DN 90 ( Ø90)/180mm, certification marks for concealed cistern: Noise Class I

## COLOURS

None	92214200	4051202483197
------	----------	---------------


## TECHNICAL DRAWINGS

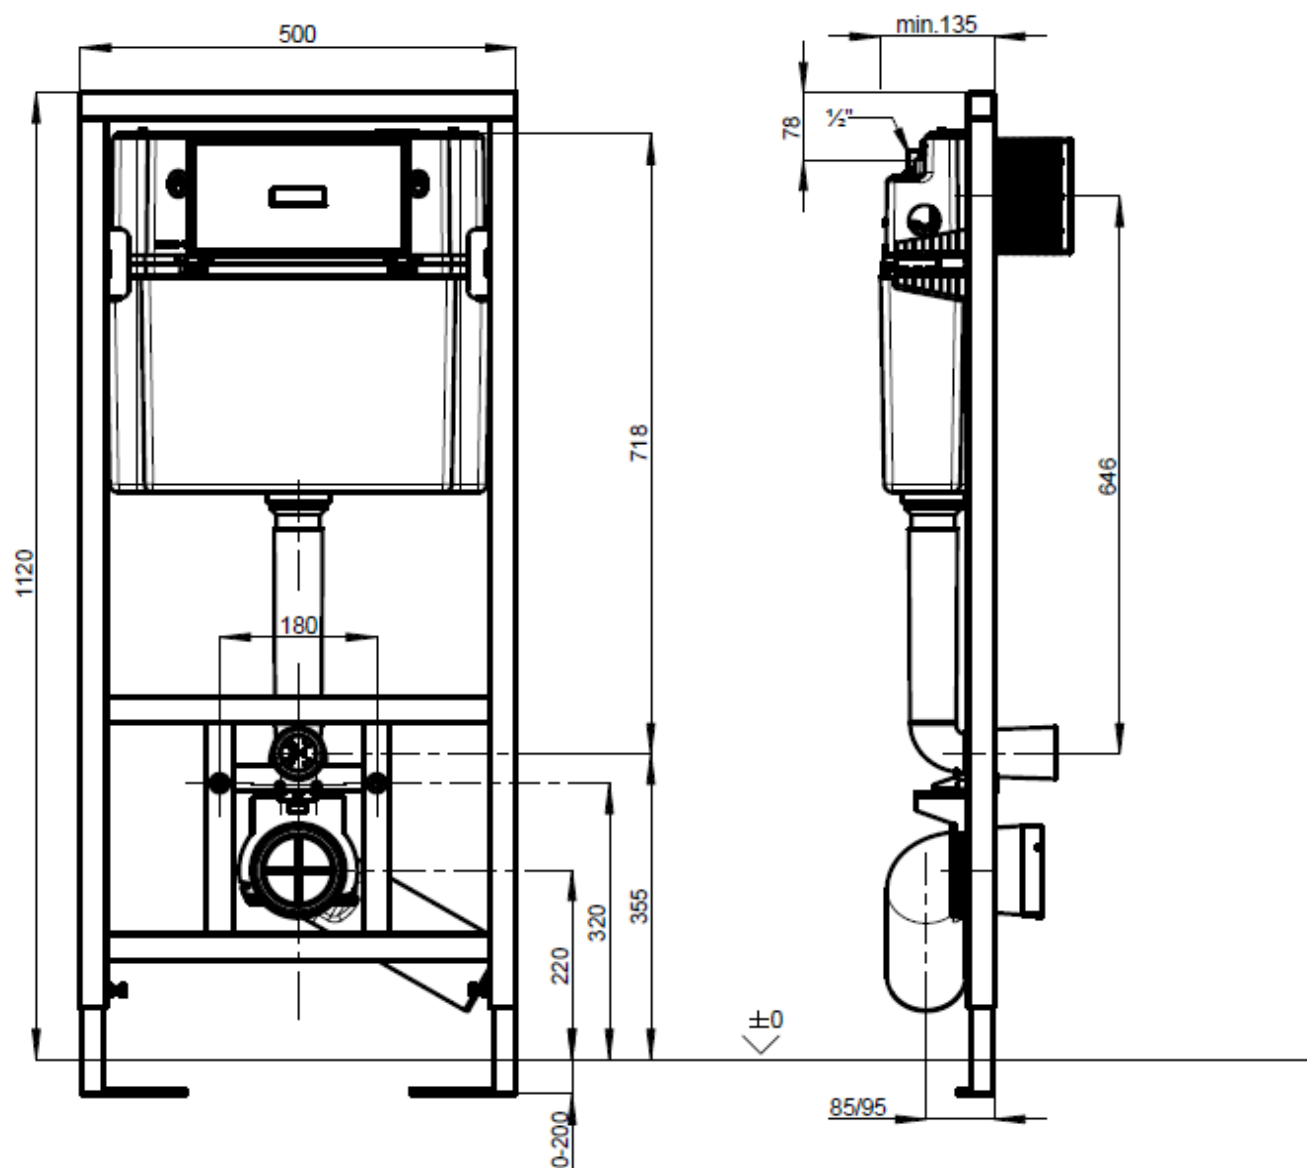

# Flush plate ViConnect Pro

## PRODUCT INFORMATION

### 2. POSITION

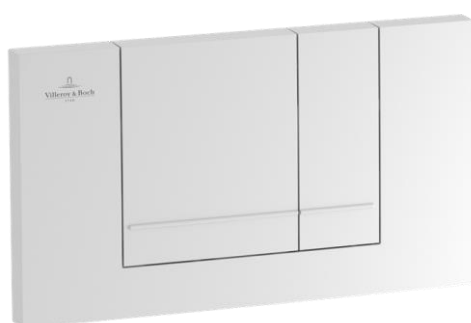

<b>Model</b>	<b>922143</b>
Collection	ViConnect Pro
Width	280 [mm]
Height	160 [mm]
Depth	16 [mm]
Weight	0,6 [kg]
Description	B100; ViConnect Pro flush plate frame, support frame and fastening bolts, individual packaging materials, made of high-quality ABS material, front/top operated, combinable with Aquareduct WC, water-saving dual flush technology
Specification text	ViConnect Pro flush plate; B100; Size: 280 x 160 x 16 mm; flush plate frame; support frame and fastening bolts; individual packaging materials; made of high-quality ABS material, front/top operated; combinable with Aquareduct WC; water-saving dual flush technology

## COLOURS

chrome		92214361	4051202483128
white		92214368	4051202483135
brushed chrome		92214369	4051202483500

## TECHNICAL DRAWINGS

